



SUB 20 Subwoofer

Description

The SUB 20 is a very compact, passive subwoofer designed for use in multi-channel systems with a system controller. It produces remarkable bass levels thanks to a high-power 6.5" long excursion driver in a double-vented bandpass cabinet.

Thanks to its slim design, compact dimensions and defined sound outlets, it can be easily concealed in furniture and fittings. The SUB 20 features two parallel-switched Speakon terminals (input and thru) or pluggable screw-type terminals. The connectors are recessed to ensure that plugs and cables can be hidden from sight.

The SUB 20 is the ideal match for satellite speakers in our installation series as well as for the ZL 50, ZL 100, ZL 104 and ZL 108 column speakers, and for the built-in speakers in the DE, DE-X and DE Plan series.

Key Features


- Bandpass-Subwoofer
- Sehr kompakte Bauform
- 6,5"-Langhub-Chassis
- Belastbarkeit 200 Watt
- Standardfarben Weiß und Schwarz

Fields of Application

- Ausstellungen, Messen
- Gastronomie, Hotels
- Konferenzräume
- Läden, Verkaufsräume
- Medienräume
- Surround-Anlagen
- Home Audio

SUB 20 Subwoofer

Dimensions

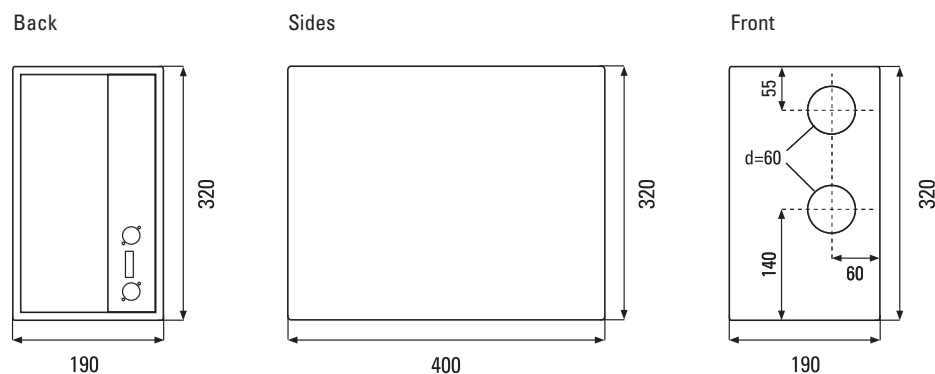

Technical Data

Principle	Double vented bandpass subwoofer
Components	6.5" long excursion driver
Frequency range	38 Hz – 150 Hz
Impedance	8 ohms
Power capacity	100 watts RMS, 200 watts program
Sensitivity	91 dB (1 W@1 m), half-space
Maximum SPL	114 dB @1 m, half-space
Dimensions (W x H x D)	190 x 320 x 400 mm
Weight	5.8 kg
Cabinet	Plywood, semi-matt varnish
Connectors	2 x SPEAKON and pluggable screwtype terminals
Warranty	5 years

Model

Order-No.

Version

SUB 20 White	1310-0001	RAL 9016
SUB 20 Black	1310-0002	RAL 9005

Other colours and versions on request

Measuring Diagram

SUB 20 Sens. 2,83 V/1m: 91 dB, 40-160 Hz (-6 dB) full space

