



SUB 40 Subwoofer

Description

The SUB 40 is a compact, passive subwoofer designed for use in multi-channel systems with a system controller. It produces high bass levels thanks to two high-power 6.5" long excursion drivers in a double-vented bandpass cabinet. Thanks to its slim design, compact dimensions and defined sound outlets, the SUB 40 can be easily concealed in furniture and fittings.

It features two parallel-switched Speakon terminals (input and thru) or pluggable screw-type terminals. The connectors are recessed to ensure that the plugs and cables can be hidden from sight.

The SUB 40 is the perfect match for satellite speakers in our installation series as well as for column speakers in the ZL series and for built-in speakers in the DE, DE-X and DE Plan series.

Key Features


- Bandpass subwoofer
- Compact design
- 2 × 6.5" long excursion drivers
- 400 watts power capacity
- Standard finish: white or black

Fields of Application

- Conference rooms
- Gastronomy, hotels
- Home audio
- Shops, sales rooms
- Surround systems

SUB 40 Subwoofer

Dimensions

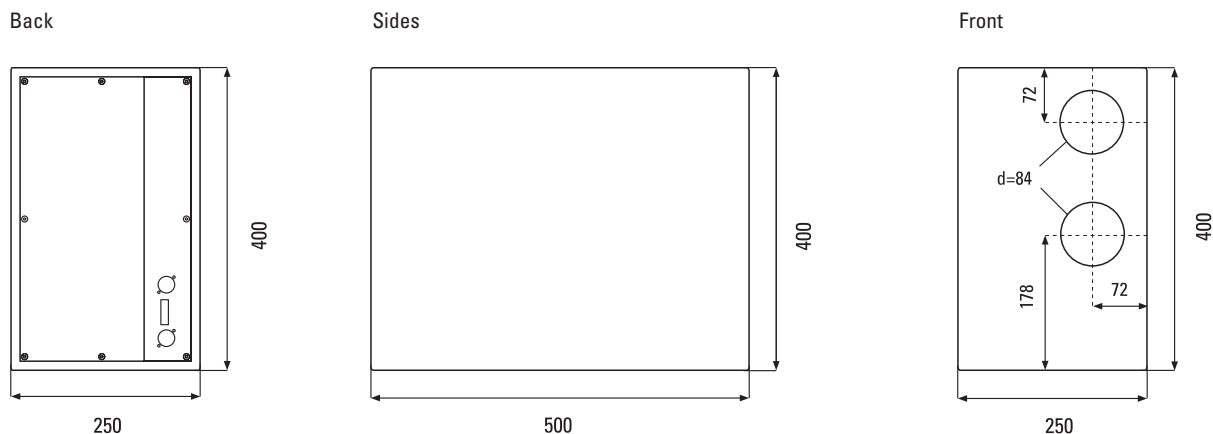


Technical Data

Principle	Double vented bandpass subwoofer
Components	2 × 6.5" long excursion driver
Frequency range	35 Hz – 150 Hz
Impedance	8 ohms
Power capacity	200 watts RMS, 400 watts program
Sensitivity	93 dB (1 W@ 1 m), half-space
Maximum SPL	118 dB @ 1 m, half-space
Dimensions (W×H×D)	250 × 400 × 500 mm
Weight	11 kg
Cabinet	Plywood, semi-matt varnish
Connectors	2 × SPEAKON and pluggable screw-type terminals
Warranty	5 years

Measuring Diagramm

SUB 40 Sens. 2,83 V/1m: 93 dB (50-100 Hz)

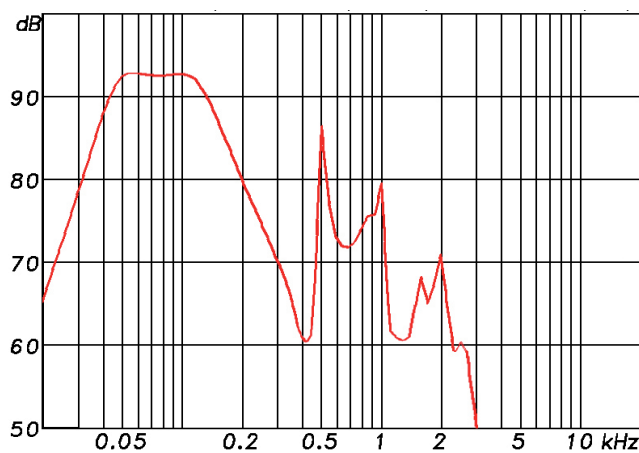

Model	Order-No.	Version
SUB 40 White	1320-0001	RAL 9016
SUB 40 Black	1320-0002	RAL 9005

Other colours and versions on request