

SUB 80 Subwoofer

Description

The SUB 80 is a powerful, passive subwoofer designed for use in multi-channel systems with a system controller. It produces very high bass levels thanks to four high-power 6.5" long excursion drivers in a double-vented bandpass cabinet.

Thanks to its slim design, compact dimensions and defined sound outlets, the SUB 80 can be easily concealed in furniture and fittings.

It features two parallel-switched Speakon terminals (input and thru) or pluggable screw-type terminals.

The connectors are recessed to ensure that the plugs and cables can be hidden from sight.

The SUB 80 is the perfect match for our satellite speakers in the installation and PA series and for line arrays in the ZL series.



Key Features


- Bandpass subwoofer
- Compact design
- 4 × 6.5" long excursion drivers
- 800 watts power capacity
- Standard finish: white and black

Fields of Applications

- Conference rooms
- Clubs, discotheques
- Gastronomy, hotels
- Home audio
- Surround systems

SUB 80 Subwoofer

Dimensions

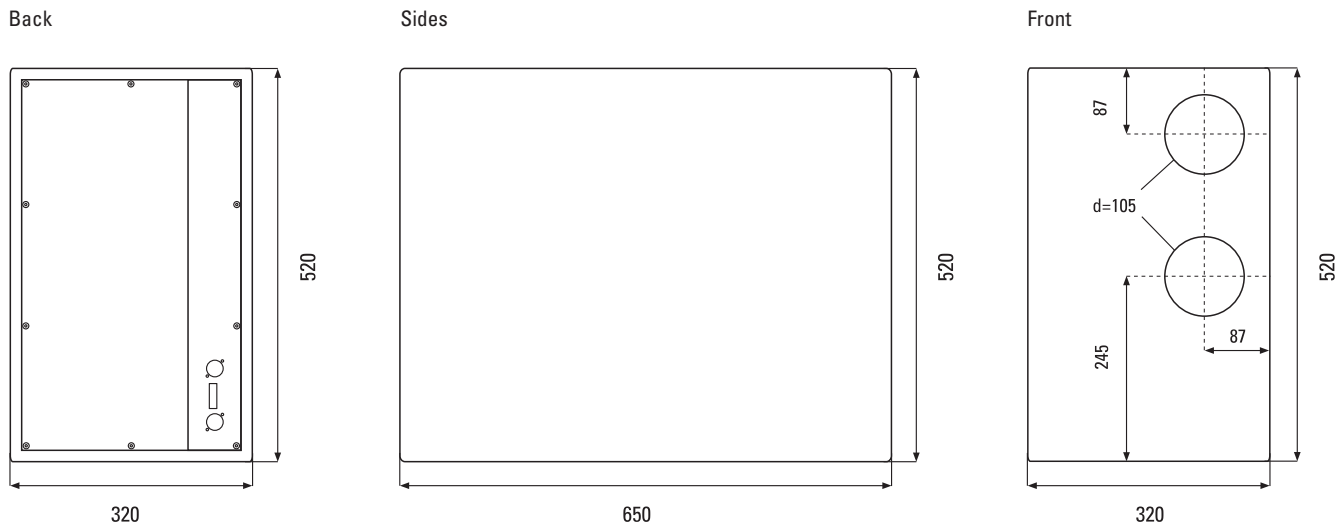


Technical Data

Principle	Double vented bandpass subwoofer
Components	4 × 6.5" long excursion drivers
Frequency range	28 Hz – 140 Hz
Impedance	4 ohms
Power capacity	400 watts RMS, 800 watts program
Sensitivity	95 dB (1 W@1 m), half-space
Maximum SPL	124 dB @ 1 m, half-space
Dimensions (W × H × D)	320 × 520 × 650 mm (without rubberfeet)
Weight	22 kg
Cabinet	Plywood, semi-matt varnish
Connectors	2 × SPEAKON and pluggable screw-type terminals
Warranty	5 years

Measuring Diagram

SUB 80 Sens. 2,83 V/1m: 93 dB (50-100 Hz)

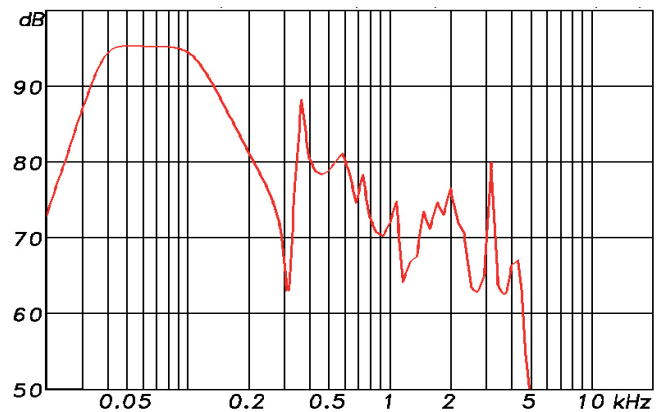

Model	Order-No.	Version
SUB 80 White	1330-0001	RAL 9016
SUB 80 Black	1330-0002	RAL 9005

Other colours and versions on request